



Freezefog Pro – Low Smoke Machine

Dramatic low-lying fog



Features:

- Dramatic long hanging low fog
- Dry, white, water based effect
- Smoke output up to 41000 cbm/hr
- Continuous output
- Modular quick disconnect fitting for LC02
- Use with low or high pressure CO2
- Use in conjunction with G300, GForce 2, GForce 3
- Available with road case
- Warranty – 24 months

Le Maitre's Freezefog Pro creates a powerful, controllable, low-lying smoke effect or fog curtain when used in conjunction with G300, GForce-2 or GForce-3 and specially formulated Le Maitre low smoke fluid.

Le Maitre's Freezefog Pro is the original Low Smoke Generator or LSG, demanded by theatres, film sets, clubs, tours and theme parks around the globe for its ability to produce thick, dry, low-lying, white smoke.

Control & Programming

- Use with G300, GForce-2 or GForce-3
- Via smoke machine - 2 channel DMX or optional Hand Held Remote
- Use in conjunction with low pressure or high pressure liquid CO2
- Automatic and continual flow control of smoke machines: An extremely high accuracy thermal monitoring system combined with the microprocessor control and a highly stable patented heat exchanger, allows a self-management system to automatically adjust the flow rate for maximum conditions at any temperature.

Performance

- Output (max): 41000 cubic metres/hr
- Warm up time as per smoke machines 6 - 8 mins
- Operating Time: Continuous with automatic level adjustment
- Reheat time – none
- Fluid consumption 59cc/minute
- Tested and safe for use on live stage performances

Freezefog Pro Low Smoke Machine (continued)

Fluids

- Low Smoke Fluid: Creates a thick odourless cloud of fog with a short hang time. In conjunction with the CO2 it creates a low smoke effect similar to dry ice but without the wet residue.
- Quick Dissipating Fluid: Dissipates 2x as quickly as molecular fluid. Useful where smoke rising too quickly could be an issue. Also ideal to produce a burst of steam effect, nitrogen bursts etc.

Le Maitre's fluids are included in the "Equipment Based Guidelines for the Use of Theatrical Smoke and Haze" prepared by Environ International Corporation and can be used in compliance with ANSI standards for theatrical fog and the PLASA (previously ESTA) Fog Testing Program. Copies can be found on www.actorsequity.org.

Installation

- Orientation: Floor


Physical / Electrical

- Size (HxWxL): 610mmx 490mmx 635mm
- Weight: 17.5Kg
- Power: As per Smoke Machine

Product Codes:

	Machine & Accessories
3001	Freezefog Pro
2911C	Freezefog 10' Flexible Aluminium Ducting
2911E	Freezefog Tee Piece

	Fluids
2904	Low Smoke Fluid (5L)
2900	Low Smoke Fluid (200L)
2905	Quick Dissipating Fluid (4x5L)
2945	Quick Dissipating Fluid (200L)

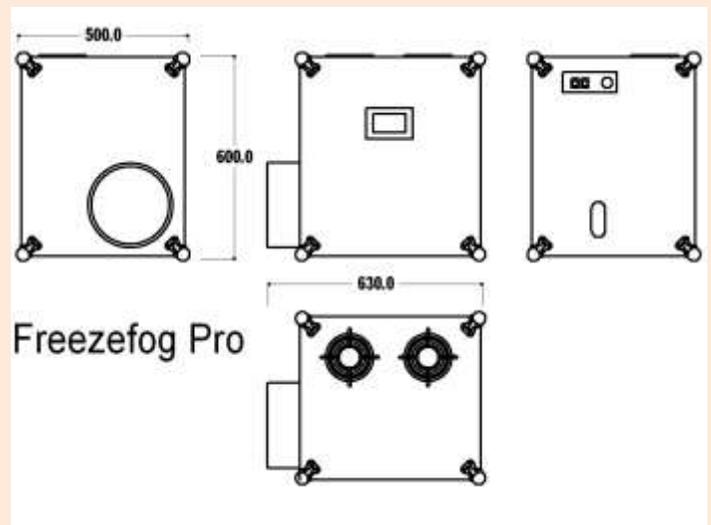

Specifications are subject to change without notice.



Le Maitre Ltd
5-6 Forval Close, Wandle Way,
Mitcham, Surrey CR4 4NE, UK
Tel: +44 208 6462222
www.lemaitreLtd.com